



BLUETOOTH SPEAKER

MD-SPBT01

QUICK SETUP GUIDE









For more information, refer to the online *User Guide* at www.bestbuy.com/modal.

Package contents

- Bluetooth speaker
- USB charging cable
- *Quick Setup Guide*

Features


- Compatible with most MP3 players, computers, mobile phones and tablets.
- Pairs and plays in seconds using a Bluetooth wireless connection. Up to 33' range offers flexible use.
- Built-in rechargeable lithium-ion battery providing up to 5 hours of battery life.
- Battery level monitor that shows the battery level on your Apple/iOS devices. (Currently this feature is not available on Android devices.)
- Lightweight design offering easy portability.
- 3.5 mm line input providing a simple input connection.

#	Component	Function
1		Multi-function (✳) <ul style="list-style-type: none">• In power on state, press and hold the button for more than two seconds to enter into pairing mode. The LED alternates blinking red and white.• When the phone rings, quickly press the multi-function (✳) button to answer the phone call.• To end a call, press the multi-function (✳) button twice. NOTE: For Android users: make sure that the "Phone Audio" function is active in the Bluetooth settings. For more information refer to the online <i>User Guide</i> .
2	AUX IN jack	Plug an external audio device into this jack. The default source for this speaker is Bluetooth. If a cable is inserted into this AUX IN jack, the source is automatically switched to AUX IN. Unplug the cable and the source automatically switches back to Bluetooth.
3		Power <ul style="list-style-type: none">• Slide the switch to the right to power on the speaker  – LED ON (red/white LED blinking to enter auto pairing mode)• Slide the switch to the left to turn the speaker off  – LED OFF• When power is on, the unit automatically connects to the last paired Bluetooth device within six seconds. If the last paired Bluetooth device is not in range, the unit automatically searches for another device to pair to.
4		<ul style="list-style-type: none">• Press to increase the volume.
5		<ul style="list-style-type: none">• Press to decrease the volume.
6	USB 	Connect the USB charging cable to charge the battery.
7		Auto Mute/End Phone Call Music Mode <ul style="list-style-type: none">• Turn the speaker face-down to mute the audio. Turn the speaker face-up to unmute audio. Phone Call Mode <ul style="list-style-type: none">• Shake the speaker to answer an incoming phone call.• During a phone call, turn the speaker face-down to end the call.
8	Status indicator LED	LED Status Information Power <ul style="list-style-type: none">• LED is white when speaker is turned on. LED is off when speaker is turned off. Charging <ul style="list-style-type: none">• When speaker is off, LED is red while charging. After charging is complete, red LED turns off.• When speaker is on, LED is solid red while charging. After charging is complete, red LED turns off and white LED is on. Other <ul style="list-style-type: none">• No Bluetooth connection, white LED flashes slowly.• Bluetooth is in pairing mode, white and red LED alternate blinking.• Successful Bluetooth connection, solid white LED.• White LED blinks quickly when increasing/decreasing the volume. When the minimum/maximum volume is met, LED is solid white.• LED quickly blinks red when battery is low. Speaker remains on for approximately 10 more minutes.

Charging the speaker

When the battery is low, the red LED blinks quickly.

- To charge, connect the charging cable to your Bluetooth speaker and an available USB port on your computer. The red LED turns off when finished.

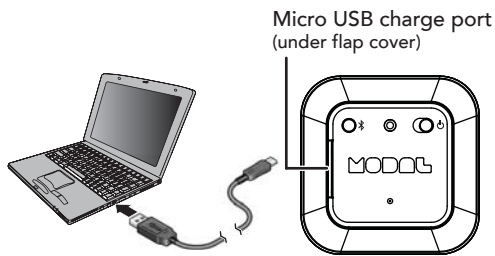

Turning on and off

- Slide the power (⏻) switch to turn your speaker on or off.

Bluetooth pairing

Note: The Bluetooth range is 33 feet (10 meters).

- Press and hold the multi-function (⌘) button until the white and red LED indicators blink.
- Enter pairing mode on your Bluetooth device, then select *Modal MD-SPBT01* from the list to pair.

Note: For more information on entering pairing mode, see the instructions that came with your Bluetooth device.


- To unpair, turn off Bluetooth on your Bluetooth device.

Connecting AUX devices

- To listen to audio from a non-Bluetooth device, connect a 3.5 mm audio from your speaker to your audio device.

Controlling volume and playback

- Use your audio device to play, pause, and select tracks.
 - Press + or – to increase/decrease the volume.
- Note:** Make sure that the volume level on your Bluetooth device is at least 50%.
- Turn your speaker face down to mute.

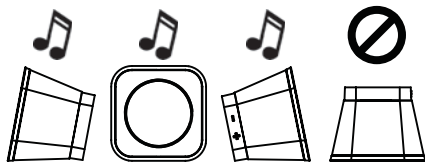

Using the speakerphone

When paired to your phone:

- To answer a call, press the multi-function (⌘) button once or shake the speaker to answer the phone.
- Press + or – to increase/decrease the speakerphone volume.
- Turn your speaker face down to end a call.
- Press the multi-function (⌘) button twice to end the phone call.

Specifications

Dimensions (L x W x H)	3.7 × 3.7 × 2.9 in. (94.21 × 94.21 × 73 mm)
Frequency	100Hz -20KHz 3W power with 1% THD
Weight	7.65 oz. (217g)
Bluetooth range	33 feet (10 m)
Supported Bluetooth profiles	A2DP, HFP

FCC Statement

This device complies with Part 15 of the FCC Rules and Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the

interference by one or more of the following measure:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC Statement

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment.

One-year limited warranty

Contact Modal

For customer service call 1-800-499-3402.

MODAL is a registered trademark of BBY Solutions, Inc. Registered in some countries. Distributed by Best Buy Purchasing, LLC, 7601 Penn Ave South, Richfield, MN 55423 U.S.A. ©2013 BBY Solutions, Inc. All Rights Reserved.